★ Green Device Available
★ Super Low Gate Charge
★ Excellent CdV/dt effect decline
★ Advanced high cell density Trench technology

Description


The ZX 4884 is the high cell density trenched N-ch MOSFETs, which provide excellent RDSON and gate charge for most of the synchronous buck converter applications.

The ZX 4884 meet the RoHS and Green Product


Product Summary

BVDSS	RDSON	ID
40V	12mΩ	12A

SOP8 Pin Configuration



pin assignment



Schematic diagram

Package Marking and Ordering Information

Product	Package	Marking	Packing	Min Unit Quantity
ZX 4884	SOP8	*	3000PCS/Reel	3000PCS

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	40	V
V_{GS}	Gate-Source Voltage	±20	V
I_D@T_A=25℃	Continuous Drain Current[1]	12	A
I_D@T_A=70℃	Continuous Drain Current[1]	7	A
I_{DM}	Pulsed Drain Current[2]	40	A
EAS	Single Pulse Avalanche Energy[3]	31	mJ
I_{AS}	Avalanche Current	10	A
P_D@T_A=25℃	Total Power Dissipation[4]	2.9	W
T_{STG}	Storage Temperature Range	-55 to 150	℃
T_J	Operating Junction Temperature Range	-55 to 150	℃

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-ambient[1](t≤10s)	---	40	℃/W
	Thermal Resistance Junction-ambient[1]	---	65	℃/W

N-CH Electrical Characteristics (T_A=25℃unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	V_{GS}=0V I_D=250μA	40	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=40V,V_{GS}=0V	-	-	1	μA
Gate-Body Leakage Current	I_{GSS}	V_{GS}=±20V,V_{DS}=0V	-	-	±100	nA
On Characteristics (Note 3)						
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS}=V_{GS},I_D=250μA	1	1.5	2.0	V
Drain-Source On-State Resistance	$R_{DS(ON)}$	V_{GS}=10V, I_D=8A	-	12.0	16	mΩ
		V_{GS}=4.5V, I_D=4A	-	18.9	24	mΩ
Forward Transconductance	g_{FS}	V_{DS}=5V,I_D=8A	33	-	-	S
Dynamic Characteristics (Note4)						
Input Capacitance	C_{lss}	V_{DS}=20V,V_{GS}=0V, F=1.0MHz	-	964	-	PF
Output Capacitance	C_{oss}		-	109	-	PF
Reverse Transfer Capacitance	C_{rss}		-	96	-	PF
Switching Characteristics (Note 4)						
Turn-on Delay Time	$t_{d(on)}$	V_{DD}=20V, R_L=2.5Ω V_{GS}=10V,R_{GEN}=3Ω	-	5.5	-	nS
Turn-on Rise Time	t_r		-	14	-	nS
Turn-Off Delay Time	$t_{d(off)}$		-	24	-	nS
Turn-Off Fall Time	t_f		-	12	-	nS
Total Gate Charge	Q_g	V_{DS}=20V,I_D=8A, V_{GS}=10V	-	22.9	-	nC
Gate-Source Charge	Q_{gs}		-	3.5	-	nC
Gate-Drain Charge	Q_{gd}		-	5.3	-	nC
Drain-Source Diode Characteristics						
Diode Forward Voltage (Note 3)	V_{SD}	V_{GS}=0V,I_S=9A	-	0.8	1.2	V

N- Channel Typical Electrical and Thermal Characteristics (Curves)

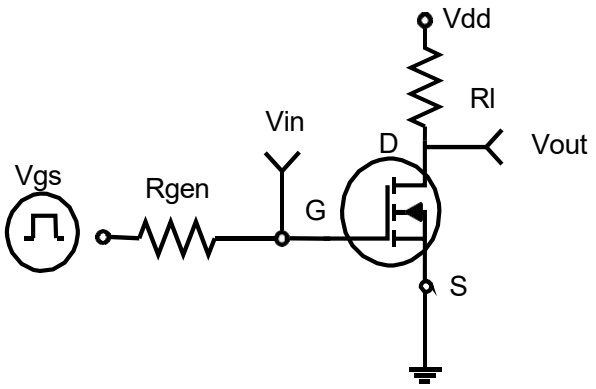


Figure 1:Switching Test Circuit

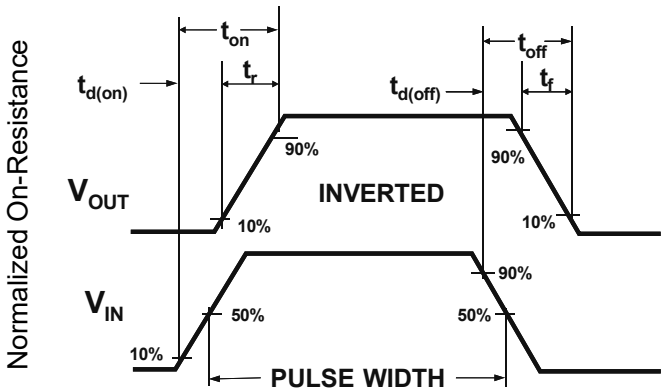


Figure 2:Switching Waveforms

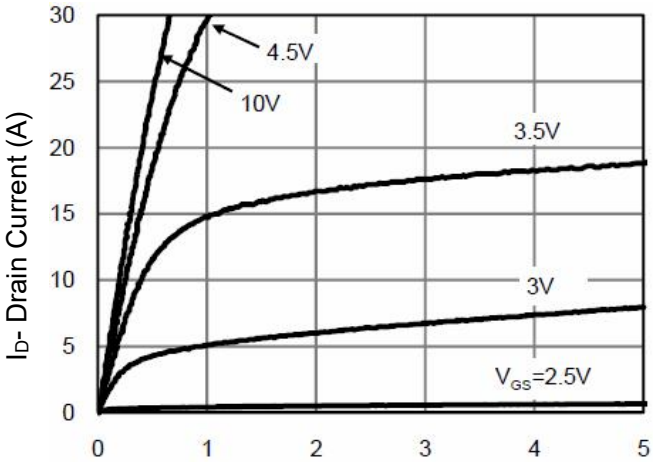


Figure 3 Output Characteristics

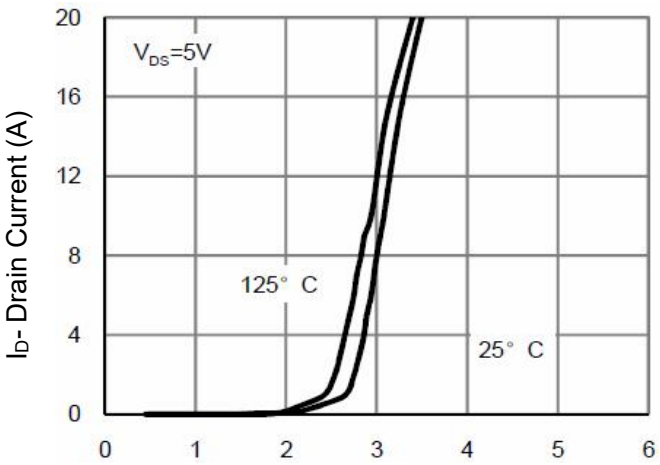


Figure 4 Transfer Characteristics

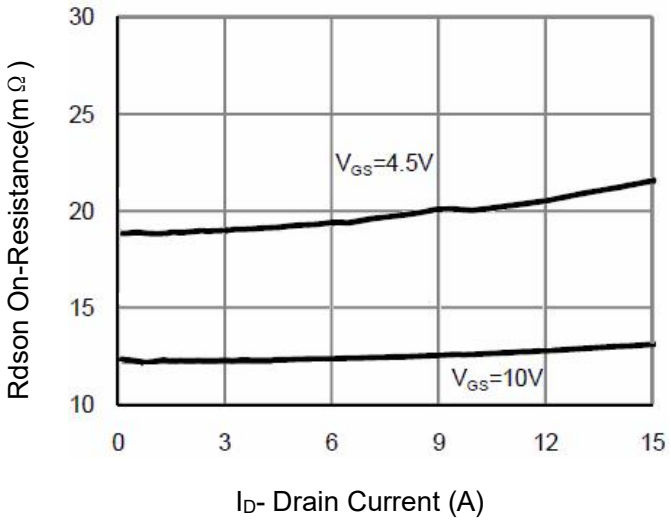


Figure 5 Drain-Source On-Resistance

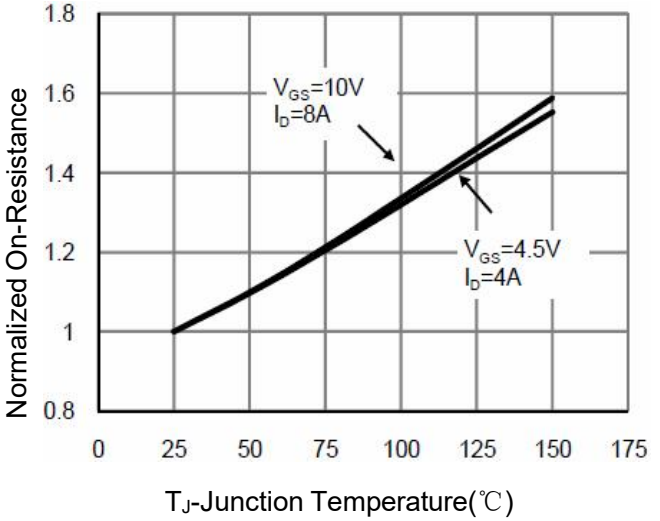


Figure 6 Drain-Source On-Resistance

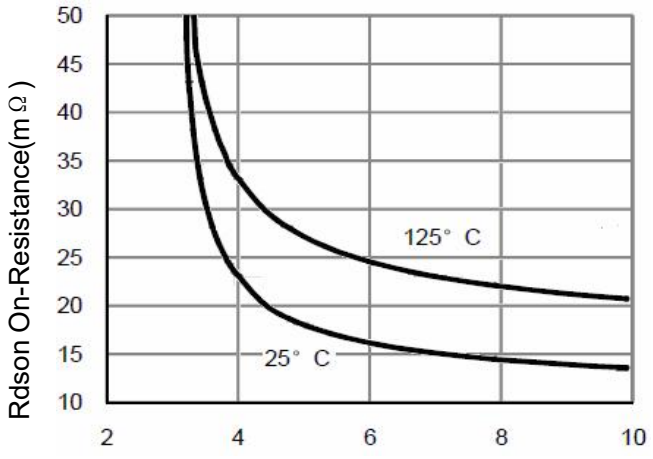


Figure7 Rdson vs Vgs

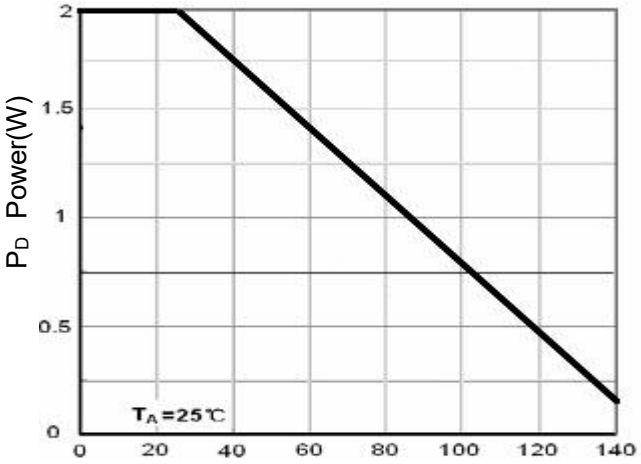


Figure 8 Power Dissipation

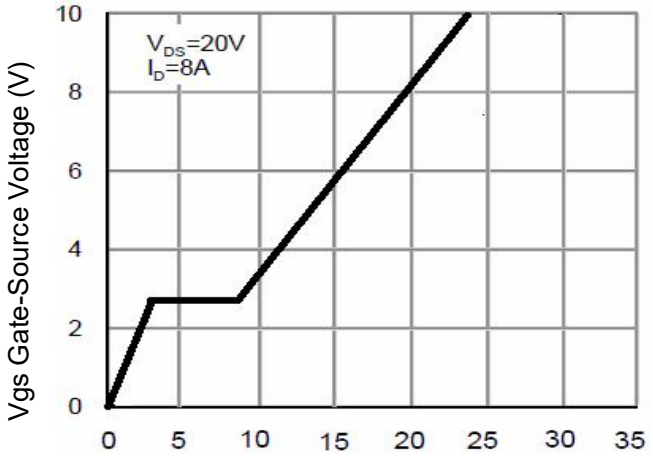


Figure 9 Gate Charge

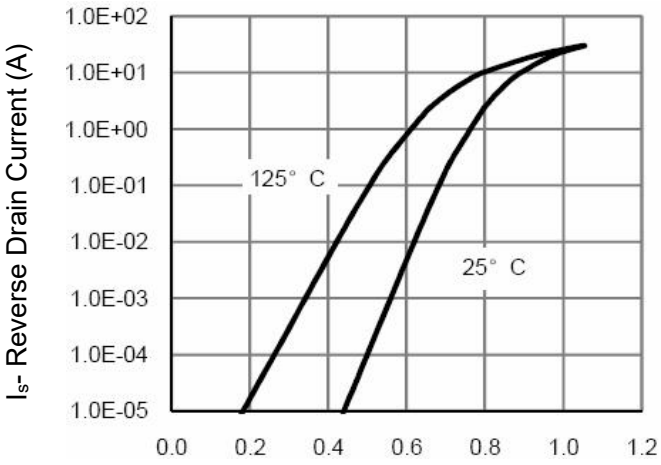


Figure 10 Source- Drain Diode Forward

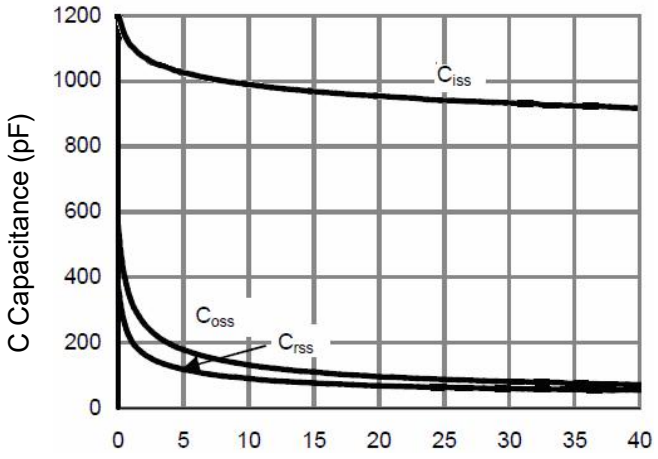


Figure 11 Capacitance vs Vds


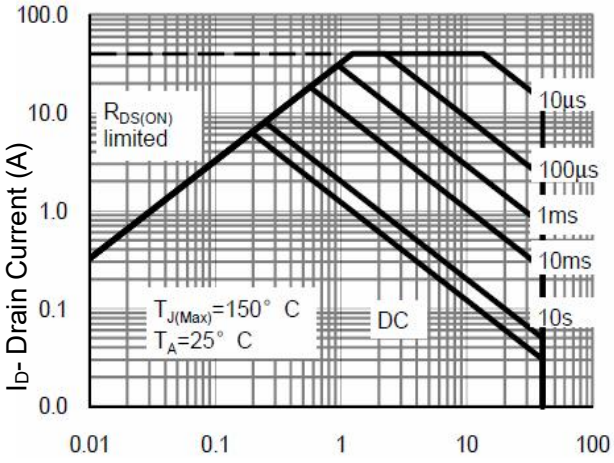


Figure 12 Safe Operation Area

SOP-8 Package Information

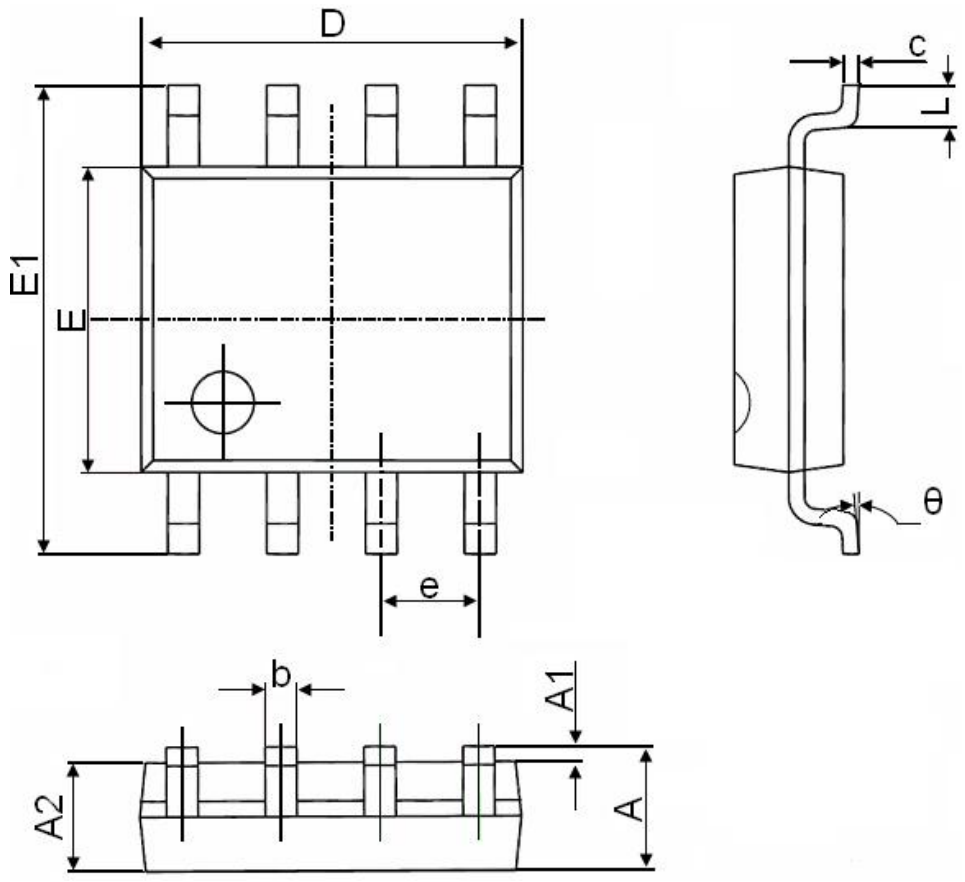

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.270(BSC)		0.050(BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°